



# 5W Ku-Band Block Up Converter

## KEY FEATURES


- ◆ Small package size and weight
- ◆ Feed horn mounting
- ◆ Powered through IF cable
- ◆ Low power consumption (<39W)
- ◆ High power efficiency (5W min @P1dB over temperature)
- ◆ Side connector
- ◆ 14.00-14.50 GHz/13.75-14.25 GHz/  
13.75-14.50 GHz options
- ◆ RoHS compliant
- ◆ Three-year warranty

## ABA5KU / ABA5KUF



This small and light weight 5W L-to Ku-Band Block Up Converter is designed to be mounted on the feed horn. High power efficiency resulting in low current (<2 amps) consumption allows user to pass DC supply voltage via IF cable.

## Mechanical Drawing

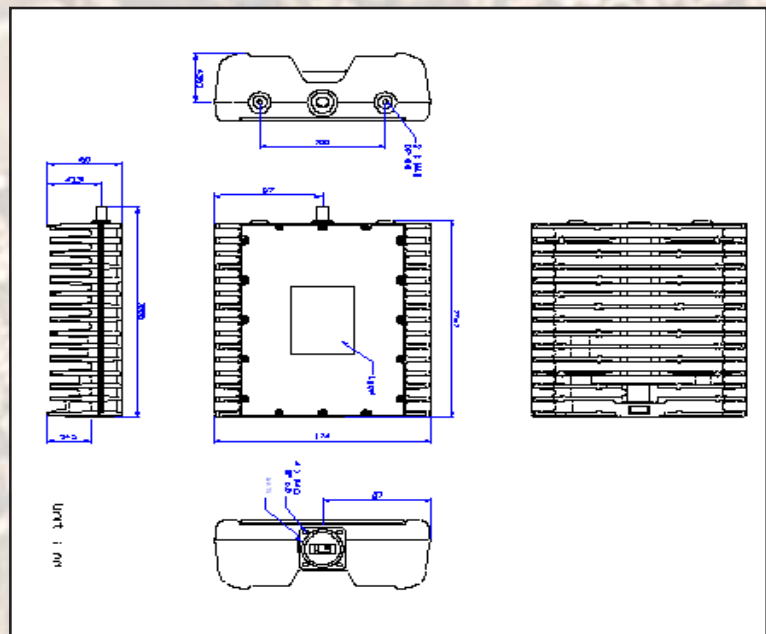



# 5W Ku-Band Block Up Converter

<b>TECHNICAL SPECIFICATIONS</b>		
<b>RF frequency</b>	<b>ABA5KU</b>	14.00 to 14.50 GHz
<b>Local oscillator</b>	<b>ABA5KU</b>	13.05 GHz
<b>IF frequency</b>		950 to 1,450 MHz
<b>Output power @ P1dB min over temperature</b>		5W (+37 dBm min.)
<b>IF connector</b>		N-type or F-type
<b>Power supply</b>		+15 VDC~+24 VDC via IF cable 39 W max
<b>Output interface</b>		WR-75 Grooved
<b>Linear gain</b>		60 dB nominal
<b>Gain variation</b>		0.7 dB p_p 2.0 dB p_p 2.2 dB p_p @ fixed frequency
<b>Over operating temperature</b>	<b>over 54 MHz over 500 MHz</b>	
<b>Requirement for external reference</b>		via IF cable
	frequency	10 MHz (sine-wave)
	input power	-5 to +5 dBm @ input port
<b>Phase noise</b>		-53 dBc/Hz max. @ 10 Hz -63 dBc/Hz max. @ 100 Hz -73 dBc/Hz max. @ 1 kHz -83 dBc/Hz max. @ 10 kHz -93 dBc/Hz max. @ 100 kHz -110 dBc/Hz max @ 1 MHz
<b>Noise figure</b>		20 dB max
<b>Input V.S.W.R.</b>		2 : 1 max
<b>Output V.S.W.R.</b>		2 : 1 max.
<b>Mute</b>		Shut off the BUC in case of L.O. unlocked
<b>Input interface</b>	<b>ABA5KU ABA5KUF</b>	50 Ohm (N-type IF in) 75 Ohm (F-type IF in)
<b>Temperature range (ambient)</b>		
	operating	-40 deg C to +55 deg C
	storage	-40 deg C to +75 deg C
<b>Dimensions &amp; housing</b>		176 (L) x 174 (W) x 60 (H) mm 6.95" (L) x 6.9" (W) x 2.4" (H)
<b>Weight</b>		1.9 kg (4.18 lbs) max