



## 6W Low Ku-Band Block Up Converter

### KEY FEATURES


- ◆ Output frequency 12.75 - 13.50 GHz
- ◆ Based on GaN technology which enables high efficiency, low power consumption and high reliability.
- ◆ Double- L.O. (switchable 11.80 & 12.05 GHz)
- ◆ Incomparable low power consumption (35W max)
- ◆ Advanced M&C interface - combined RS-232/485, Ethernet (HTTP and SNMP ver.2 and 3) and optional FSK
- ◆ Auto-ranging 15-60 VDC powering option
- ◆ Digital temperature compensation
- ◆ Power and lock status LED
- ◆ Built-in redundancy option
- ◆ Field-exchangeable (F/N) IF connector
- ◆ Internal 10MHz high stability reference (optional)

### ABE6KXHLM / ABE6KXHLMF



This smallest and lightest 6W L-To Low Ku-Band Block Up Converter is based on GaN technology. Double L.O. and field- Exchangeable connector make unit universal for any Low Ku-Band application. Incomparable low power consumption allows the BUC to be powered by iDirect and similar modems. Internal 10MHz reference option enables using the BUC with the modems without 10MHz reference.

### Mechanical Drawing

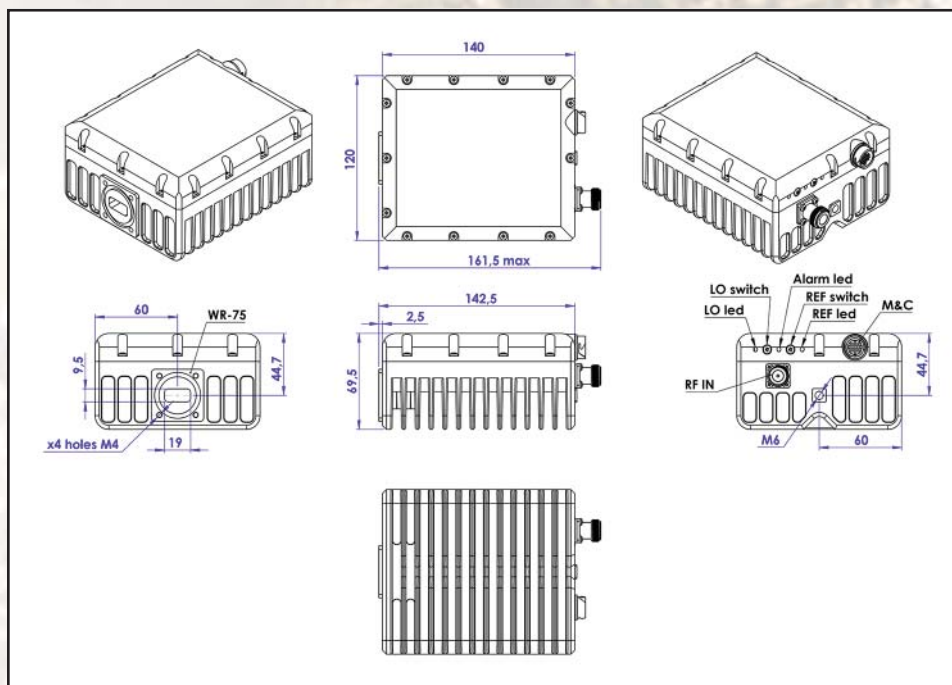



## 6W Low Ku-Band Block Up Converter

TECHNICAL SPECIFICATIONS	
<b>RF frequency</b>	12.75 - 13.50 GHz
<b>Dual local oscillator</b>	11.80 and 12.05 GHz
<b>IF frequency</b>	950 to 1,700 MHz
<b>Output power</b>	6W (+38 dBm min.)
<b>IF connector</b>	N-type or F-type (field-exchangeable)
<b>Power supply : auto-ranging via IF connector</b>	+15 VDC ~ +60 VDC, 35W max.
<b>Output interface</b>	WR 75 G
<b>Gain</b>	62 dB nominal
<b>IMD3 (two tones)</b>	-26 dBc max. 2 signal 5 MHz apart at P-LINEAR
<b>L.O. leakage</b>	-45 dBm max
<b>Spurious</b>	-50 dBc max
<b>Spectral regrowth</b> (QPSK at 1.5x and OQPSK at 1.0x symbol rate offset with 2dB back-off from rated output power)	-30 dBc
<b>Requirement for external reference:</b> frequency input power	<b>via IF cable</b> 10 MHz (sine-wave) -5 to +5 dBm @ input port
<b>TX Gain variation</b>	± 0.5 dB over 40 MHz
<b>TX Gain stability over temperature range</b>	± 1.8 dB over full band ± 1.5 dB typ., ± 1.8 dB max.
<b>Phase noise</b>  (Exceeds Intelsat's standard IESS308/309)	-53 dBc/Hz max. @ 10 Hz
	-63 dBc/Hz max. @ 100 Hz
	-73 dBc/Hz max. @ 1 KHz
	-83 dBc/Hz max. @ 10 KHz
	-93 dBc/Hz max @ 100 KHz
	-113 dBc/Hz max @ 1 MHz
<b>Noise power density</b>	
<b>Transmit</b>	-66 dBm/Hz (max)
<b>Receive</b>	-157 dBm/Hz (max)
<b>FSK</b>	Multiplexed on TX IFL, compatible with Comtech and Paradigm
<b>M&amp;C Interface</b>	RS-232, RS-485 and Ethernet (HTTP and SNMP ver.2 and 3)
<b>Noise figure</b>	15 dB max
<b>Input V.S.W.R.</b>	2 : 1 max
<b>Output V.S.W.R.</b>	2 : 1 max.
<b>Mute</b>	Shut off the HPA if L.O. unlocked
<b>Status LED</b>	
<b>RED</b>	Summary alarm
<b>GREEN</b>	All OK
<b>YELLOW</b>	All OK standard L.O. 12.05 GHz
<b>YELLOW blinking</b>	All OK extended L.O. 11.80 GHz
<b>Temperature range (ambient)</b>	
operating	-40 deg C to +55 deg C
storage	-55 deg C to +85 deg C
<b>Vibration and shock</b>	Complies with MIL-STD-810E
<b>Dimensions &amp; housing</b>	140 (L) x 120 (W) x 69.5 (H) mm  5.51" (L) x 4.72" (W) x 2.78" (H)
<b>Weight</b>	1.2 kg (2.6 lbs) max