




## 15W Ext. 5.85-6.725 GHz C-Band BUC

### KEY FEATURES


- ◆ Output frequency 5.850-6.725 GHz
- ◆ Based on GaN technology which enables high efficiency, low power consumption and high reliability.
- ◆ Incomparable low power consumption (58W max)
- ◆ Advanced M&C interface - combined RS-232/485, Ethernet (HTTP and SNMP ver. 3) and optional FSK
- ◆ Key Line capability
- ◆ Auto-ranging 15-60 VDC powering option
- ◆ Digital temperature compensation
- ◆ Power and lock status LED
- ◆ Field-exchangeable (F/N) IF connector
- ◆ Internal 10MHz high stability reference (optional)
- ◆ RoHS compliant

### ABE15DCM / ABE15DCMF

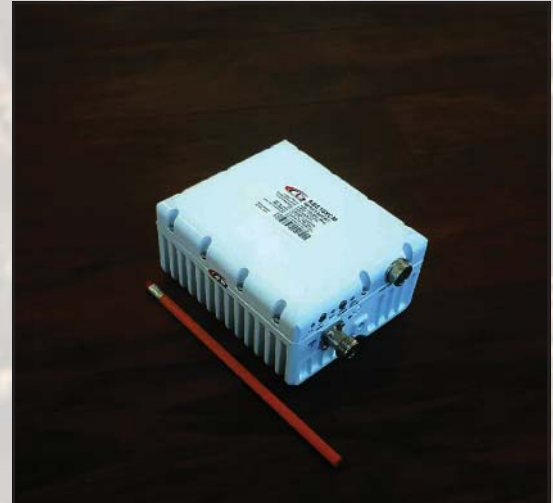

This smallest and lightest 15W L-To C-Band Block Up Converter is based on GaN technology. It is designed to be mounted on the feed horn. High power efficiency resulting in the low current ( $\leq 1.5$  amps @ 24 VDC). The unit covers C-Band sub-bands: Standard (5.850-6.425 GHz) and Palapa (6.365-6.725 GHz).

### Mechanical Drawing

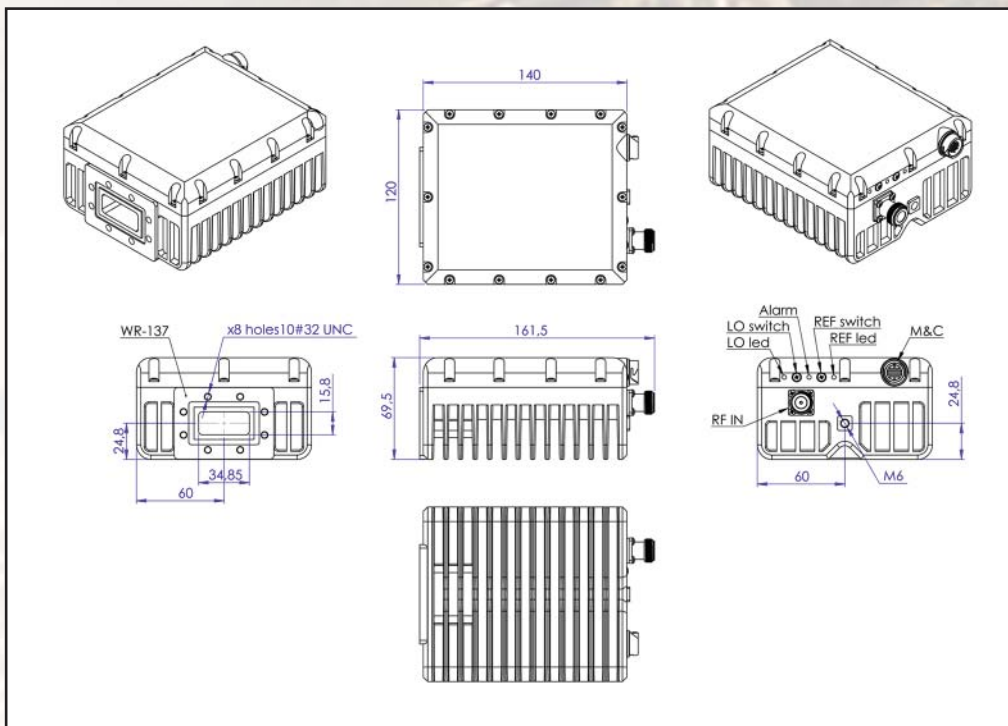



## 15W Ext. 5.85-6.725 GHz C-Band BUC

TECHNICAL SPECIFICATIONS		
RF frequency	5.850 to 6.725 GHz	
Local oscillator	4.90 GHz	
IF frequency	950 to 1,825 MHz	
Output power	15W (+41.8 dBm min.)	
IF connector	N-type or F-type (field-exchangeable)	
Power supply : auto-ranging via IF connector	+15 VDC ~ +60 VDC, 58W max.	
Output interface	CPR 137 G	
Internal 10MHz high stability reference	10 <sup>-8</sup>	
Gain	65 dB nominal	
IMD3 (two tones)	-26 dBc max. 2 signal 5 MHz apart at P-LINEAR	
L.O. leakage	-45 dBm max	
Spurious	-50 dBc max	
Spectral regrowth (QPSK at 1.5x and OQPSK at 1.0x symbol rate offset with 2dB back-off from rated output power)	-30 dBc	
Requirement for external reference: frequency input power	via IF cable 10 MHz (sine-wave) -5 to +5 dBm @ input port	
TX Gain variation	± 0.5 dB over 40 MHz ± 1.8 dB over full band	
TX Gain stability over temperature range	± 1.5 dB typ., ± 1.8 dB max.	
Phase noise  (Exceeds Intelsat's standard IESS308/309)	-53 dBc/Hz max. @ 10 Hz	
	-63 dBc/Hz max. @ 100 Hz	
	-73 dBc/Hz max. @ 1 KHz	
	-83 dBc/Hz max. @ 10 KHz	
	-93 dBc/Hz max @ 100 KHz	
Noise power density	Transmit	-66 dBm/Hz (max)
	Receive	-157 dBm/Hz (max)
FSK	Multiplexed on TX IFL, compatible with Compech and Paradigm	
M&C Interface	RS-232, RS-485 and Ethernet (HTTP and SNMP ver. 3)	
Noise figure	15 dB max	
Input V.S.W.R.	2 : 1 max	
Output V.S.W.R.	2 : 1 max.	
Mute	Shut off the HPA if L.O. unlocked	
Status LED	RED GREEN YELLOW	Summary alarm All OK All OK standard L.O. 4.90 GHz
Temperature range (ambient)	operating	-40 deg C to +55 deg C
	storage	-55 deg C to +85 deg C
Vibration and shock	Complies with MIL-STD-810E	
Dimensions & housing	140 (L) x 120 (W) x 69.5 (H) mm	
	5.51" (L) x 4.72" (W) x 2.78" (H)	
Weight	1.2 kg (2.6 lbs) max	